

GPS183PEX

Product Highlights

- | High-accuracy reference clock for installation in any desktop or server system with a free PCI Express slot
- | 12-channel GPS receiver for optimum reception of GPS satellites from a fixed location
- | Ease of configuration using Meinberg Radio Clock Monitor tool



A High-Accuracy Clock Card for GPS Synchronization in Your Desktop or Server

The GPS183PEX reference clock for PCI Express slots is symbolic of Meinberg's longest tradition of GPS-based timekeeping—a robust 12-channel receiver-clock module capable of acquiring the de facto standard GPS signals and using these to synchronize the host PC's clock and directly generate ultra-precise 10 MHz frequency signals, PPS clock signals as well as various time-of-day string formats for high-accuracy timekeeping.

The GPS183PEX is a self-contained reference clock module that uses the PCI Express interface to communicate with the host PC in order to synchronize the host PC's clock and also to allow management and monitoring using the free Meinberg Radio Clock Monitor tool “MbgMon”.

Meinberg Funkuhren GmbH & Co. KG
Lange Wand 9
31812 Bad Pyrmont, Germany
✉ sales@meinberg.de
🌐 www.meinbergglobal.com
Phone: +49 5281 9309-0

Meinberg USA Inc.
111 Santa Rosa Ave., Suite 401,
Santa Rosa, CA 95404, USA
✉ info@meinberg-usa.com
🌐 www.meinbergglobal.com
Phone: +1-877-PTP-1588



Basic Specifications

Receiver Type	12-channel GPS C/A code receiver
Mixer Frequency	10 MHz (clock to antenna/converter)
Intermediate Frequency	35.4 MHz (antenna/converter to clock)
Compatible Antennas	Meinberg GPSANTv2 (recommended for best performance) or legacy Meinberg GPSANT ("GPSANTv1")

Accessories Included

- A Meinberg GPSANTv2 Antenna for outdoor installation, a mounting kit containing all the accessories required to mount the antenna on a pole or wall, and a 20 m (65.6 ft) RG 58 coaxial cable with pre-fitted connectors as standard*.
- Optional: MBG-S-PRO surge protector for in-line installation between the antenna and your GPS183PEX module.

* Meinberg also offers customized antenna cables to accommodate your specific installation requirements. Please reach out to your Meinberg Sales Representative for more information.

Oscillator Options


The GPS183PEX is shipped as standard with a "TCXO" type oscillator (temperature-controlled crystal oscillator), which provides excellent holdover performance if your GPS183PEX loses synchronization with its upstream references for any reason. The GPS183PEX may also be shipped on request with a more powerful "OCXO SQ" or "OCXO HQ" holdover solution. The performance metrics are listed below for comparison:

Type	Short-Term Stability ($\tau = 1$ second)	Holdover Temperature Drift	Holdover Performance (1 Day)*	Holdover Performance (1 Year)*
TCXO	2×10^{-9}	$\pm 2 \times 10^{-7}$ (-20°C to 70°C)	± 4.3 ms	± 16 s
OCXO SQ	5×10^{-10}	$\pm 1 \times 10^{-7}$ (-10°C to 70°C)	± 65 μs	± 4.7 s
OCXO HQ	5×10^{-12}	$\pm 1 \times 10^{-8}$ (5°C to 70°C)	± 10 μs	± 788 ms

* The provided values were measured under an ambient temperature of approximately 20°C (68°F) without exposure to any acceleration forces such as vibration. Mechanical shocks and vibrations can adversely affect oscillator performance. Full holdover performance requires the system to have been synchronized for 24 hours previously.


Connectors and Variants

The GPS183PEX is shipped with an alternative low-profile bracket that can be used as a replacement for the standard bracket. The low-profile bracket can be attached by the end user.

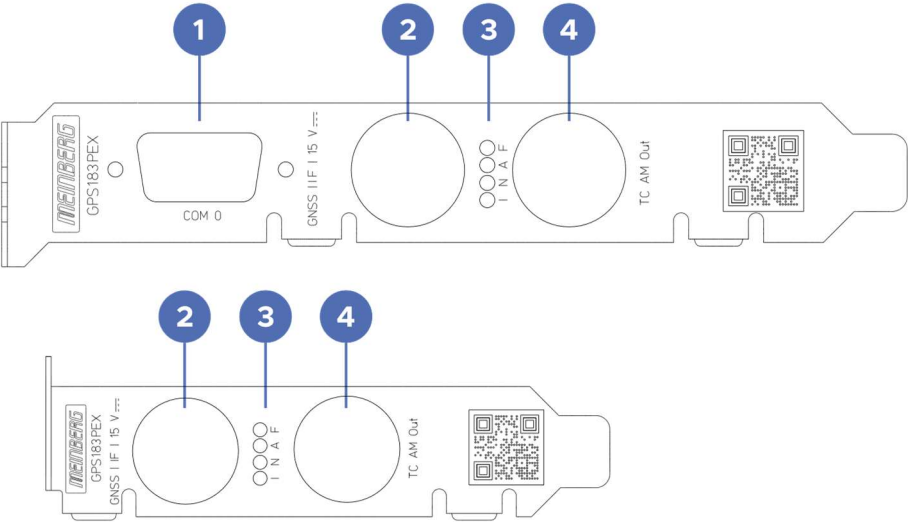

1 COM I/O

Pin	Function	Signal Level
1	+ 5 V DC / Programmable Signal Out 1*	PPO1: RS-232
2	RS-232 RxD (Receive)	RS-232
3	RS-232 TxD (Transmit)	RS-232
4	Programmable Signal Out 2*	RS-232
5	GND (Ground)	-
6	Capture Input 0	TTL
7	Capture Input 1 / DCLS Timecode*	Capture Input: TTL DCLS Timecode: TTL with 50 Ω load
8	Programmable Signal Out 1*	RS-232
9	Programmable Signal Out 2* / Programmable Signal Out 3*	RS-232

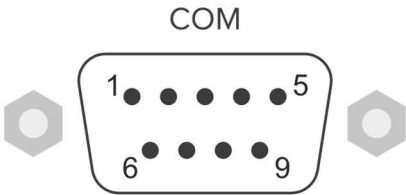


* Requires DIP switch adjustment on the GPS183PEX board.

Connector Type	D-Sub 9-pin, male
Supported Time Strings (Output)	Meinberg Standard (Default), Meinberg Capture, Meinberg GPS, SAT, NMEA RMC, NMEA GGA, NMEA ZDA, NMEA RMC GGA (RMC followed by GGA), NMEA GGA ZDA (GGA followed by ZDA), Uni Erlangen, Computime, Sysplex 1, SPA, RACAL, ION, ION Blanked, IRIG-J-1x, 6021, Freelance
Baud Rates	19200 (Default), 9600, 4800, 2400, 1200, 600, 300
Framing Options	7N2, 7E1, 7E2, 8N1 (Default), 8N2, 8E1, 8O1
Supported Cable Type	Standard RS-232 (female) for time string output Modified or custom D-Sub 9 cable (female) for other signal output

2 GPS Antenna Input

Connector Type	Bayonet Neill-Concelman (BNC) connector for coaxial cable
Input Impedance	50 Ω
Input Signal	35.4 MHz intermediate frequency
Power Supply	15 V, 100 mA to antenna via antenna cable
Supported Cable Length	Max. 300 m (RG 58) Max. 700 m (RG 213) Max. 1100 m (H2010 Ultraflex)

Antenna
GNSS
IF | 15 V




3 LED Status Indicators

"I" LED (Initialization) System Status	"N" LED (Navigation) Reference Signal Status	"A" LED (Antenna) Geolocation Status	"F" LED (Fail) Initialization Status
Indicates initialization by the on-board firmware and the host operating system and the warm-up state of the onboard oscillator	Indicates whether the GPS183PEX module has been able to complete geolocation by locating at least four satellites	Indicates whether the antenna is correctly connected and functional and whether a signal has been received	Indicates initialization by the on-board firmware and the host operating system and the warm-up state of the onboard oscillator

4 AM Timecode Output

Connector Type	BNC, female (for shielded coaxial cable)
Output Signal	Sine wave signal, unbalanced, amplitude modulated
Signal Level	3 V _{pp} / 1 V _{pp} (MARK/SPACE) with 50 Ω load
Carrier Frequency	1 kHz
Supported Time Code Formats	IRIG-B (B122, B123, B126, B127), AFNOR NF S87-500, IEEE 1344, C37.118




TC AM Out


Coaxial Cable Options

The GPSANTv2 Antenna features an integrated frequency downscaler that converts the signal on the GPS L1/Galileo E1 1575.42 MHz band to a significantly lower frequency of 35 MHz. This allows for transmission of the signal over up to 1100 m of suitable standard coaxial cable without any amplification. Please note when planning your transmission route that amplifiers cannot be used due to the bidirectional exchange of signals.


Signal Attenuation with RG58C/U Cable at 35 MHz (Intermediate Frequency)*



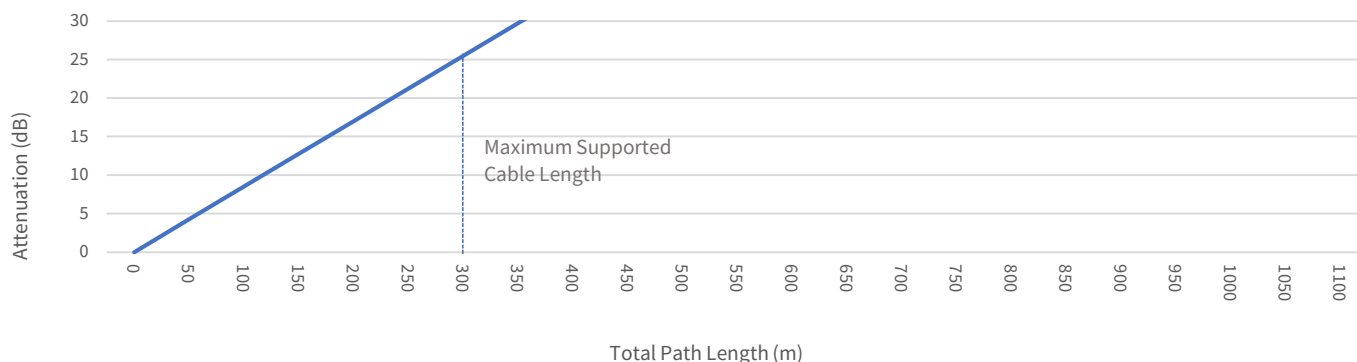


Signal Attenuation with RG213 Cable at 35 MHz (Intermediate Frequency)*

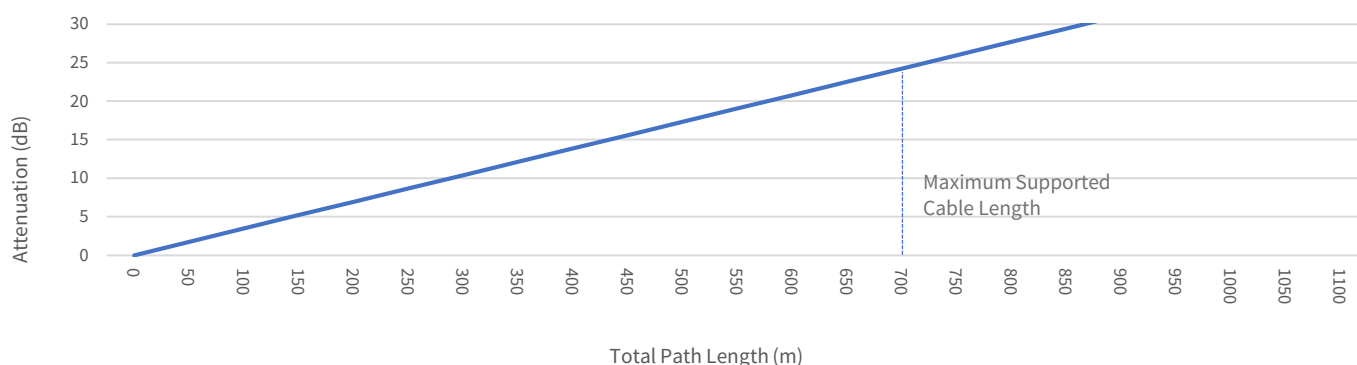

Signal Attenuation with H2010 Ultraflex Cable at 35 MHz (Intermediate Frequency)*

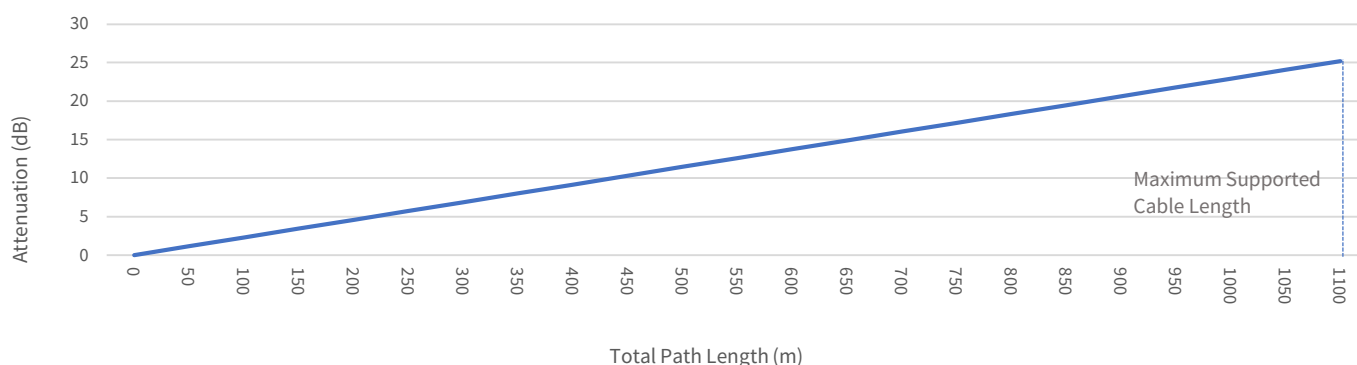

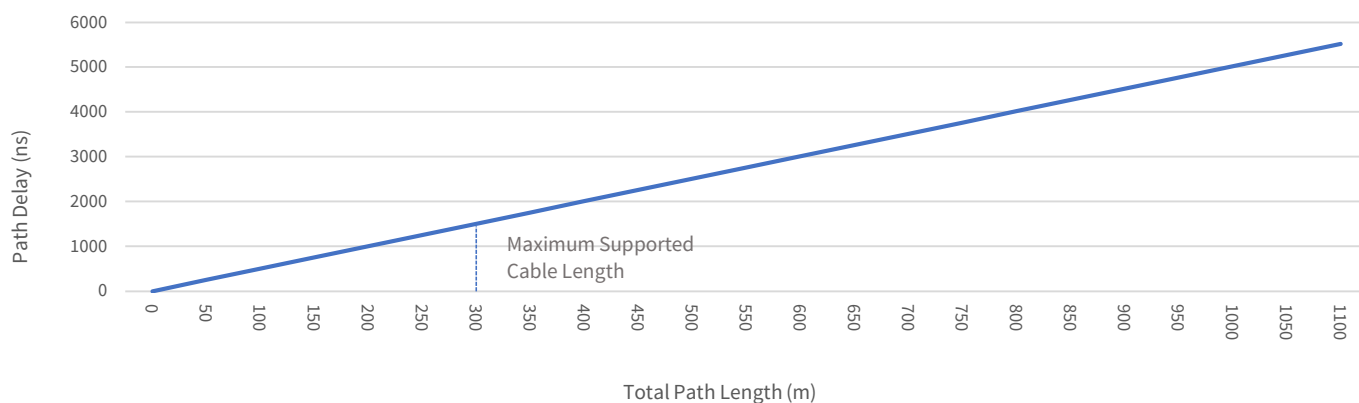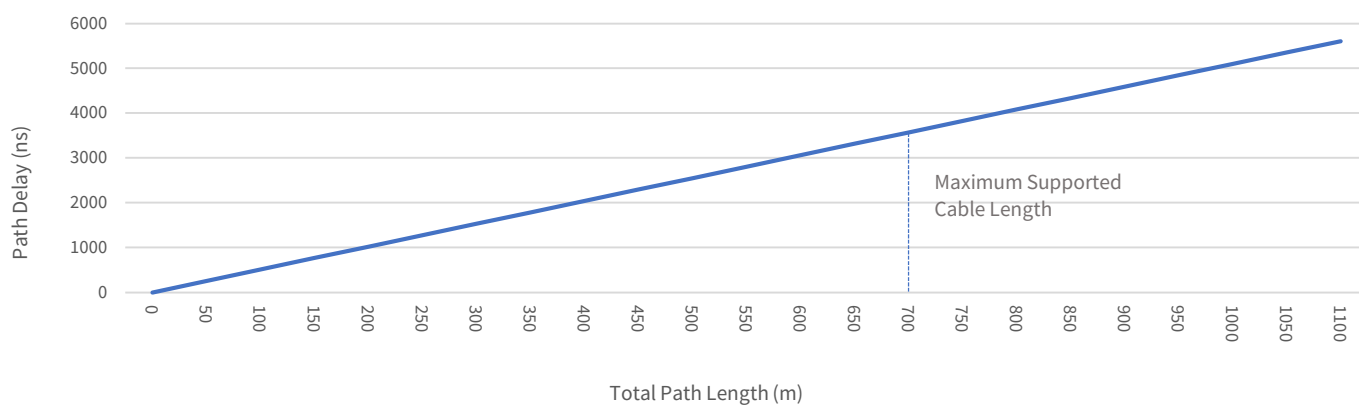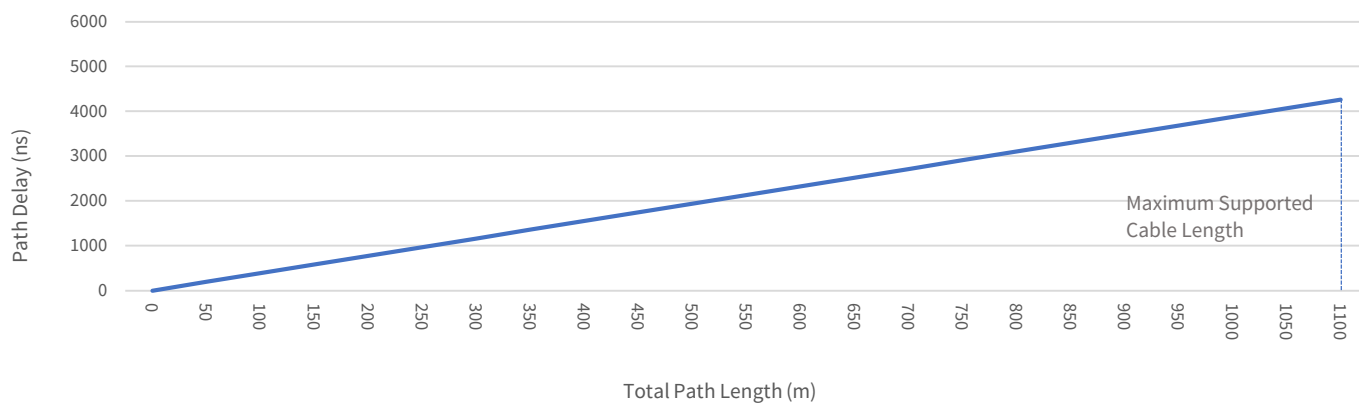Signal Path Delay with RG58C/U Cable at 35 MHz (Intermediate Frequency)***Signal Path Delay with RG213 Cable at 35 MHz (Intermediate Frequency)*****Signal Path Delay with H2010 Ultraflex Cable at 35 MHz (Intermediate Frequency)***

Test conditions: Propagation time and signal attenuation measured on 100 m of continuous RG58C/U, RG213, and H2010 Ultraflex coaxial cable. Graph calculated based on the known assumption that, if cable specifications and frequency are constants, path attenuation (and, by extension, signal propagation delay) has a linear relationship to path length.

Output Timecode Support

IRIG AM	IRIG B122, B123, B126, B127
IRIG DCLS*	IRIG B002, B003, B006, B007
AFNOR	AFNOR NF S 87-500
IEEE	IEEE 1344, IEEE C37.118

* DCLS timecode output is available via pins 4, 7, 8, or 9 of the D-Sub 9 COM port.

Programmable Signal Support

Idle	The programmable pulse output is essentially disabled when set to “Idle”.
Timer	The output generates a voltage signal with a fixed daily schedule. It is possible to define up three times in a day when the output is switched on, and three times in a day when the output is switched off.
Single Shot	A single pulse of defined length is generated once a day at a set time of day.
Cyclic Pulse	A regular pulse is generated at defined intervals starting at midnight local time of each day.
Pulse-per-Second	A regular pulse of defined length is generated once a second.
Pulse-per-Minute	A regular pulse of defined length is generated once a minute.
Pulse-per-Hour	A regular pulse of defined length is generated once an hour.
Position OK	Generates a continuous signal as long as the GNSS receiver has successfully determined its position.
Time Sync	Generates a continuous signal as long as the clock is synchronized to its reference source.
All Sync	Generates a continuous signal as long as “Position OK” and “Time Sync” as described above are both true.
DCF77 Marks	A simulated time string is output that follows the structure of the signal transmitted by the German DCF77 time code transmitter.
DCLS Timecode	Generates DCLS Timecode in accordance with the configured IRIG or other timecode standard.
Synthesizer Frequency	Generates a custom frequency.
Time Sync	Generates a continuous signal if GPS183PEX is synchronized to its reference.

Miscellaneous Technical Information

Card Type	PCI Express card
Operating Temperature	0 °C to 50 °C (32 °F to 122 °F)
Storage Temperature	-20 °C to 70 °C (-4 °F to 158 °F)
Relative Humidity	Max. 85 % at 30 °C (86 °F), non-condensing
Other Surge Protection	Integrated surge protector to protect connected antenna from voltage surges

Miscellaneous Support & Compliance Information

Technical Support	Free lifetime support via telephone and email, including firmware updates
Warranty	Three-year warranty, extendable upon request
Firmware Updates	Firmware is field-upgradeable; updates can be installed directly from the unit or via a remote network connection. Software updates are provided free of charge for the lifetime of your Meinberg product.
RoHS Compliance	The product is fully RoHS-compliant.
WEEE Status	The purchase of this product is considered to be a “B2B” transaction (non-household product) for the purposes of the European Union Waste of Electrical and Electronic Equipment Directive; the product falls under Category 6, “Small IT and Telecommunications Equipment”. For disposal, it must be returned to the manufacturer to ensure WEEE compliance. Any transportation expenses for returning this product (at end-of-life) must be covered by the end user, while Meinberg will cover the costs for the waste disposal itself.