


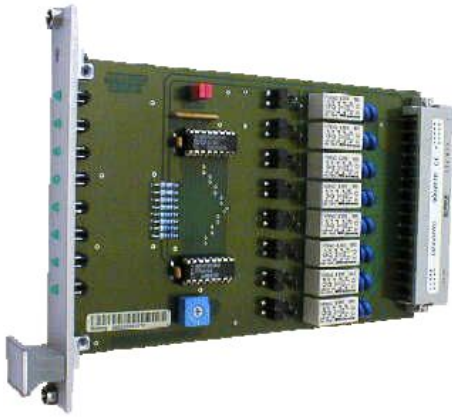

Meinberg Funkuhren

Lange Wand 9

31812 Bad Pyrmont, Germany

Phone: +49 (5281) 9309-0

Fax: +49 (5281) 9309-30

<https://www.meinbergglobal.com>

info@meinberg.de

REL8: Relay Card

Relay Card REL8

Relay Card REL8 with 8 bistable relay outputs

Important Note

This product is no longer available. We will of course continue to provide support for units that have already been purchased and are still in use. Please contact our [1][Sales Team](#) for further details.

Key Features

- No Change of Switching States in Case of Supply Voltage Failure
- Switching States indicated by LEDs
- Overvoltage Protection in all Outputs
- 8 bistable Relay Outputs with 50 Watt Safe Load

Characteristics

Status Indicators	8 LEDs to monitor relay states
Serial Time String Output	I2C Bus The relay card can be addressed by a radio clock UA509P or UA509 with special software. In this way it is possible to get 16 additional switching outputs for the UA509P resp. 8 switching outputs for the UA509.
Relay Outputs	8 changeover contacts, max. 50W load Overvoltage protection with varistors in all outputs (U _{max} = 250V)
Dimensions of the front panel	4HP/3U (20mm x 128mm)
Electrical Connectors	48-pin VG-rail DIN 41612
Operating Voltage	+5 V DC
Current Draw	typ. 100mA, max. 450mA
Board Type	Eurocard
Board Dimensions	160 mm x 100 mm, 1,5 mm Epoxy
Supported Temperature	Operational: 0 - 50 °C (32 - 122 °F) Storage: -20 - 70 °C (-4 - 158 °F)
Supported Humidity	Max. 85 % (non-condensing) at 40 °C
RoHS Status of Product	This product is fully RoHS-compliant.
WEEE Status of Product	This product is handled as a B2B (Business to Business) category product. To ensure that the product is disposed of in a WEEE-compliant fashion, it can be returned to the manufacturer. Any transportation expenses for returning this product (at end-of-life) must be covered by the end user, while Meinberg will bear the costs for the waste disposal itself.

Manual

There is no online manual available for this product.: [2][Contact us](#)

Links:

[1] <mailto:sales@meinberg.de>

[2] <mailto:info@meinberg.de>